825 Electric Switch Lock

Description:


G&B Specialties' 825 is a low style electric switch lock for levers located between the rails at the middle of hand-operated crossovers (where clearance is limited to a minimum of 7in (17.8 cm)). This device employs a foot-operated latch with padlock, a magnet assembly, armature contacts, cam-operated controls, plunger rod, and a mechanical status indicator (Locked, Padlocked, or Unlocked). Three cam - operated contacts are provided on the 825 for line control. The unit also indicates the position of the magnet armature.



Features:

- Low style lock for space restricted installations
- Single and tandem applications
- Standard 280 Ω Resistance Magnet
- Variety of additional accessory products available upon request:

 - **Mounting Plates**
 - **Alternate Magnets Resistance**

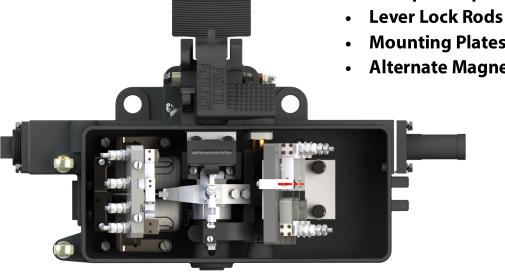


*Cover removed for detail




825 Electric Switch Lock

Unit Dimensions

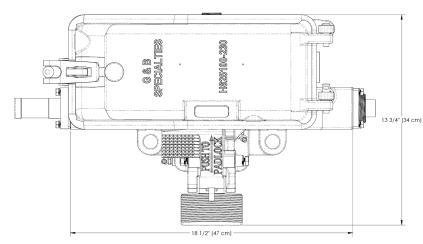

Typical 825 Electric Switch Lock Layout

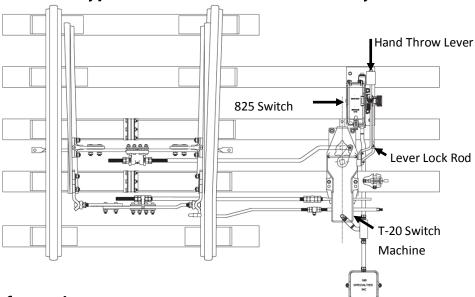

Ordering Information:

- When placing order, indicate the type of switch stand used in the installation.
- Refer to manual 8251 for replacement parts.

Model Number	Cam-Op Contacts (On)	Cam-Op Contacts (Off)	Key	Magnet Resistance (Ω)
825101-500-10	2	1	None	280
825101-500-20	1	2	None	280

P.O. Box 305
535 West Third Street
Berwick, PA 18603
570-752-5901
www.wabtec.com

