

# 825 Electric Switch Lock

## Description:

G&B Specialties' 825 is a low style electric switch lock for levers located between the rails at the middle of hand-operated crossovers (where clearance is limited to a minimum of 7in (17.8 cm)). This device employs a foot-operated latch with padlock, a magnet assembly, armature contacts, cam-operated controls, plunger rod, and a mechanical status indicator (Locked, Padlocked, or Unlocked). Three cam-operated contacts are provided on the 825 for line control. The unit also indicates the position of the magnet armature.




## Features:

- **Low style lock for space restricted installations**
- **Single and tandem applications**
- **Standard 280  $\Omega$  Resistance Magnet**
- **Variety of additional accessory products available upon request:**
  - **Lever Lock Rods**
  - **Mounting Plates**
  - **Alternate Magnets Resistance**




# 825 Electric Switch Lock

## Unit Dimensions

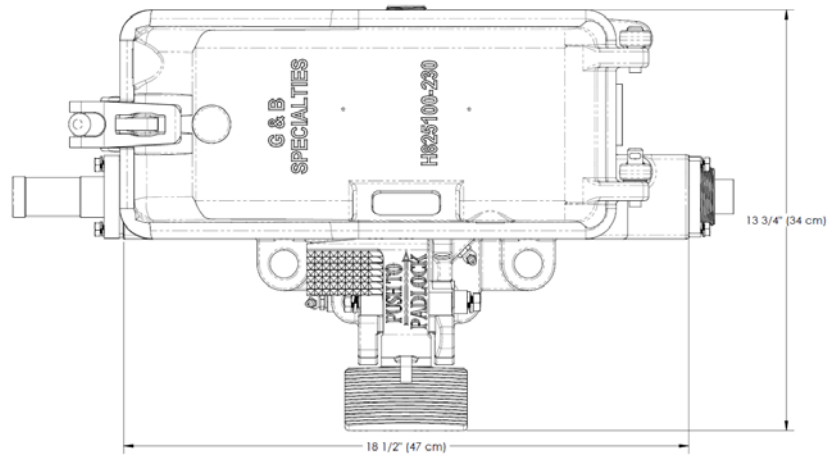

## Typical 825 Electric Switch Lock Layout

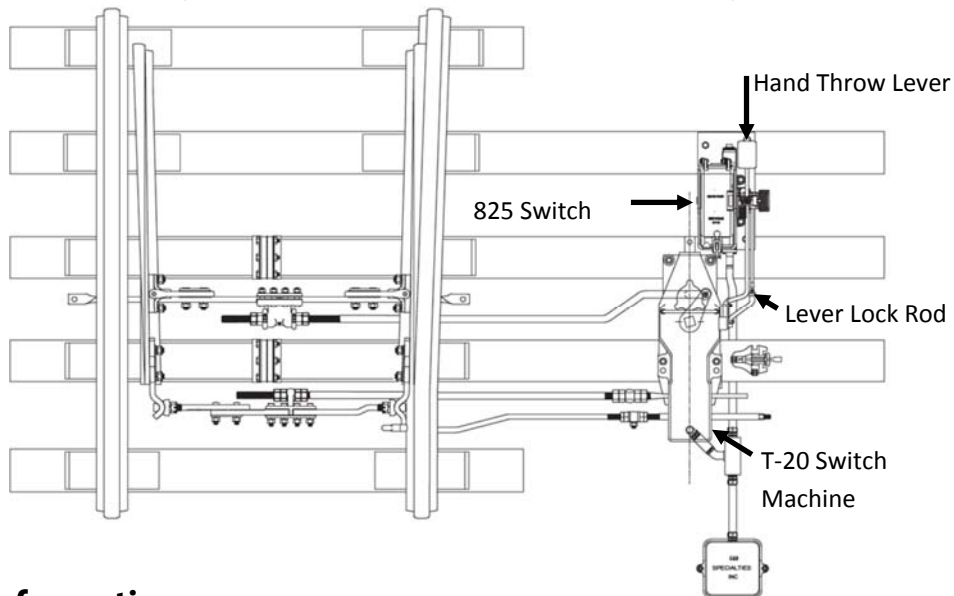

### Ordering Information:

- When placing order, indicate the type of switch stand used in the installation.
- Refer to manual 8251 for replacement parts.

Model Number	Cam-Op Contacts (On)	Cam-Op Contacts (Off)	Key	Magnet
825101-500-10	2	1	None	280
825101-500-20	1	2	None	280

*G&B Specialties*

P.O. Box 305

535 West Third Street

Berwick, PA 18603

570-752-5901

[www.wabtec.com](http://www.wabtec.com)

[www.gandbspecialties.com](http://www.gandbspecialties.com)



Rev B 09-10-2018